

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 396 865 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
10.03.2004 Bulletin 2004/11

(51) Int Cl.7: **H01B 3/44, H01B 3/46,
C09K 21/14, C08K 3/22,
C08K 3/26**

(21) Application number: **02019663.0**

(22) Date of filing: **03.09.2002**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**
Designated Extension States:
AL LT LV MK RO SI

- **Ola Fagrell**
SE 444 42 Stenungsund (SE)
- **Bernt-Ake Sultan**
SE 444 42 Stenungsund (SE)

(71) Applicant: **Borealis Technology Oy**
06101 Porvoo (FI)

(74) Representative: **Kador, Ulrich, Dr.**
Corneliusstrasse 15
80469 München (DE)

(72) Inventors:
• **Urban Andreasson**
SE 444 96 Odsmal (SE)

(54) Flame retardant polymer composition

(57) The present invention provides a flame retardant polymer composition which is free of halogen compounds and which comprises

- (A) an organic polymer matrix,
- (B) optionally a silicone-group containing compound,
- (C) an inorganic filler material which is neither a hydroxide nor a hydrated compound, and
- (D) an inorganic hydroxide or hydrated compound.

Furthermore, the present invention relates to an article, in particular a wire or a cable, which comprises the flame retardant polymer composition and to the use of said composition for the production of a flame retardant layer.

EP 1 396 865 A1

Description

[0001] The present invention relates to a flame retardant polymer composition, to an article, in particular a wire or a cable, which comprises the flame retardant composition and to the use of the flame retardant composition for the production of a flame retardant layer.

[0002] For improving the flame retardancy of polymers, several approaches are known in the art. First, it is known to include compounds containing halides into the polymer. However, these materials have the disadvantage that by burning hazardous and corrosive gases like hydrogen halides are liberated. This is also a disadvantage of flame retardant polymer composition based on halide containing polymers, e.g. PVC and fluorinated ones.

[0003] Secondly, flame retardant compositions are known which are based on the inclusion of inorganic hydroxides and/or hydrated compounds into the composition as filler materials. Such compositions are typically containing from 50 to 60 wt.% of the inorganic filler which during burning decomposes endothermically and liberates inert gases at temperatures in the range of 200 to 600°C. Such inorganic fillers e.g. include $\text{Al}(\text{OH})_3$ and $\text{Mg}(\text{OH})_2$. However, these flame retardant materials suffer from the high costs of the inorganic fillers and the deterioration of the processability and mechanical properties due to the high amount of filler.

[0004] In a third approach as disclosed e.g. in EP 0 393 959 or WO 98/12253 a flame retardant polymer composition comprises a silicon-group containing compound, an inorganic filler which is neither a hydroxide nor a substantially hydrated compound and an organic polymer matrix typically comprising an acrylate or acetate. The flame retardancy of such compositions is based on synergistic effects between these three components which in case of burning lead to the formation of a physically and firmly stable char layer that protects the polymer from further burning. Compounds based on such compositions show good flame retardancy in the limiting oxygen index (LOI) test method according to ISO 4589-A-IV. Sheathed cables and larger conduit (unsheathed) cables also fulfil specific cable test, like e.g. the single-wire burning test according to IEC 332-1. Conduit wires are, however, most commonly small and wires smaller than 4 mm² based on such compositions have difficulties in fulfilling IEC 332-1. Hence, the flame retardancy of such compositions can still be improved.

[0005] It is therefore an object of the present invention to provide a flame retardant polymer composition comprising an organic polymer matrix, optionally a silicone-group containing compound, and an inorganic non-hydrated or non-hydroxide filler material with improved flame retardancy.

[0006] The present invention is based on the finding that this object can be achieved by compositions which, in addition to an organic polymer matrix, optionally a silicone group containing compound and an non-hydrated and/or non-hydroxide inorganic filler comprise an inorganic hydroxide or hydrated compound.

[0007] The present invention therefore provides a flame retardant polymer composition which is free of halogen compounds, which comprises

(A) an organic polymer matrix,

(B) optionally a silicone-group containing compound,

(C) an inorganic filler material which is neither a hydroxide nor a hydrated compound, and

(D) an inorganic hydroxide or hydrated compound.

[0008] The inventive compositions show improved flame retardancy compared to the prior art materials as they both show good test results in the LOI test method and in addition pass the single-wire burning test. Furthermore, these compositions on decomposition do not liberate any hazardous or corrosive gases.

[0009] In the inventive compositions, component (D) is not only having no detrimental influence on the synergistic effects between components (A) to (C), but by the presence of component (A) new synergistic effects between all components (A) to (D) are caused which e.g. result in improvements of the flame retardancy as determined by the single-wire burning test.

[0010] The LOI test method is performed according to ISO 4589-A-IV. To determine the LOI value a test specimen of the compound to be evaluated is ignited in an atmosphere of a mixture of nitrogen and oxygen. A content of oxygen in the N_2 - O_2 mixture is gradually decreased until the specimen stops burning. The percentage of O_2 in that N_2 - O_2 mixture constitutes the compounds LOI value.

[0011] A high LOI value means that a high percentage of oxygen is needed to sustain combustion, i.e. the compound has a good flame resistance. The LOI value for a flame retardant composition should be at least 22 and higher values are desirable.

[0012] The purpose of the test method IEC 332-1 is to determine the resistance to flame propagation for signal vertical cables. The cable (600 mm) is installed in a vertical position and a 1kW flame produced by a propane burner

is applied onto the cable sample at a 45° angle 475 mm from the upper support of the cable. The distance between the lower and upper support should be 550 mm. For cables having an outer diameter of less than 25 mm the flame is applied for 60 seconds. In order to fulfil the test the flame should extinguish after the flame has been taken away and no charring should be visible within 50 mm from the upper support and below 540 mm.

5 [0013] In a preferred embodiment of the present invention component (B), i.e. the silicone-group containing component, mandatorily is present in the flame retardant polymer composition.

[0014] In a further preferred embodiment of the inventive composition, components (C) and (D) together are present in an amount of 30 wt. % or more, further preferred in an amount of 40 wt. % or more and most preferred in an amount of 45 wt. % or more of the total composition.

10 [0015] Further preferred, components (C) and (D) together are present in an amount of 80 wt. % or less, further preferred of 70 wt. % or less, and most preferred of 65 wt. % or less of the total composition.

[0016] It is further preferred that the weight ratio of components (C):(D) is from 30:70 to 80:20, further preferred from 40:60 to 60:40, and most preferred from 45:55 to 55:45. In a particularly preferred embodiment, the components (C) and (D) are present in the same amount.

15 [0017] Component (D) of the inventive composition is an inorganic hydroxide or hydrated compound. Component (D) may also comprise a mixtures of any of such compounds.

[0018] In a preferred embodiment of the inventive composition, component (D) is a metal hydroxide, more preferred a hydroxide of a metal of group 2 of the periodic system of the elements and/or Al, and still more preferred is magnesium hydroxide.

20 [0019] The numbering of chemical groups, as used herein, is in accordance with the IUPAC system in which the groups of the periodic system of the elements are numbered from 1 to 18.

[0020] Component (D) may be used in an uncoated or in a coated form, such as e.g. magnesium hydroxide coated with magnesium stearate.

25 [0021] Component (C), i.e. the inorganic filler material suitable for use in the inventive flame retardant polymer composition, comprises all filler materials as known in the art which are neither a hydroxide nor a substantially hydrated compound. Component (C) may also comprise a mixture of any such filler materials.

[0022] In a preferred embodiment of the inventive composition, component (C) is an inorganic carbonate, more preferred a carbonate of a metal of group 2 of the periodic system of the elements, aluminium and/or zinc, and still more preferred is calcium carbonate or magnesium carbonate. Also in these preferred embodiments concerning component (C), mixtures of any of the preferred materials mentioned, may be used. Furthermore, also polynary compounds, such as e.g. huntite ($\text{Mg}_3\text{Ca}(\text{CO}_3)_4$) may be used.

30 [0023] Particularly preferred, component (C) of the inventive flame retardant polymer composition comprises 50 wt. % or more of calcium carbonate and further preferred is substantially made up completely of calcium carbonate.

35 [0024] The inorganic filler may comprise a filler which has been surface-treated with an organosilane, a polymer, a carboxylic acid or salt etc. to aid processing and provide better dispersion of the filler in the organic polymer. Such coatings usually do not make up more than 3 wt.% of the filler.

[0025] Preferably, the compositions according to the present invention contain less than 3 wt.% of organo-metallic salt or polymer coatings.


40 [0026] In a further preferred embodiment of the inventive composition, component (B) is a silicon fluid or a gum, or a copolymer of ethylene and at least one other comonomer including a vinyl unsaturated polybishydrocarbylsiloxane, or a mixture of these compounds.

45 [0027] Silicon fluids and gums suitable for use in the present inventions are known and include for example organopolysiloxane polymers comprising chemically combined siloxy units selected from the group consisting of $\text{R}_3\text{SiO}_{0.5}$, R_2SiO , $\text{R}^1\text{SiO}_{1.5}$, $\text{R}^1\text{R}_2\text{SiO}_{0.5}$, RR^1SiO , R^1_2SiO , $\text{RSiO}_{1.5}$ and SiO_2 units and mixtures thereof in which each R represents independently a saturated or unsaturated monovalent hydrocarbon radical and each R^1 represents a radical such as R or a radical selected from the group consisting of hydrogen, hydroxyl, alkoxy, aryl, vinyl or allyl radicals.

[0028] The organopolysiloxane preferably has a viscosity of approximately 600 to 300 x 10⁶ centipoise at 25°C.

[0029] The silicone fluid or gum can contain fumed silica fillers of the type commonly used to stiffen silicone rubbers, e.g. up to 50% by weight.

50 [0030] As mentioned above, component (B) may also comprise a copolymer of ethylene and at least one other comonomer including a vinyl unsaturated polybishydrocarbylsiloxane according to formula (I):

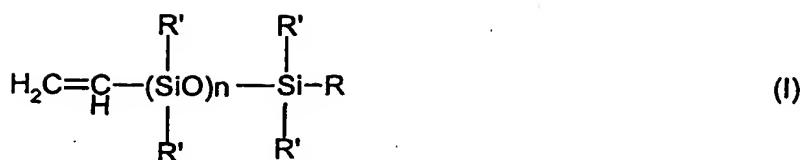

wherein $n = 1$ to 1000 and

[0031] R and R' independently are vinyl, alkyl branched or unbranched, with 1 to 10 carbon atoms; aryl with 6 or 10 carbon atoms; alkyl aryl with 7 to 10 carbon atoms; or aryl alkyl with 7 to 10 carbon atoms.

[0032] Such compounds e.g. are disclosed in WO 98/12253 the contents of which is herein enclosed by reference.

[0033] It is preferred that component (B) is present in an amount of 0 to 70 %, more preferred 1 to 10 % and still more preferred 1 to 5 % by weight of the total composition.

[0034] Preferably, component (B) is polydimethylsiloxane and/or a copolymer of ethylene and vinyl polydimethylsiloxane. These components (B) are preferred due to commercial availability.

[0035] The term "copolymer" as used herein is meant to include copolymers produced by copolymerization or by grafting of monomers onto a polymer backbone.

[0036] In a further preferred embodiment of the inventive composition, the amount of component (B) is from 0.5 to 100 parts by weight (pbw), more preferably 2 to 45 pbw, and still more preferred 3 to 25 pbw, per 100 pbw of component (A).

[0037] Suitable polymers for forming component (A) include polyolefins, polyesters, polyethers and polyurethanes. Elastomeric polymers may also be used such as, for example, ethylene/propylene rubber (EPR), ethylene/propylene-diene monomer rubbers (EPDM), thermoplastic elastomer rubber (TPE) and acrylonitrile butadiene rubber (NBR). Silane-crosslinkable polymers may also be used, i.e. polymers prepared using unsaturated silane monomers having hydrolysable groups capable of crosslinking by hydrolysis and condensation to form silanol groups in the presence of water and, optionally, a silanol condensation catalyst.

[0038] In a preferred embodiment component (A) is essentially formed by olefin homo- or copolymers. These are, for example, homopolymers or copolymers of ethylene, propylene and butene and polymers of butadiene or isoprene. Suitable homopolymers and copolymers of ethylene include low density polyethylene, linear low, medium or high density polyethylene and very low density polyethylene.

[0039] In a further preferred embodiment of the inventive composition component (A) comprises a polar polymer.

[0040] Further preferred, this polar polymer is an olefin/acrylate and/or olefin/acetate copolymer.

[0041] It is further preferred that the polar polymer comprises a copolymer of ethylene with one or more comonomers selected from C_1 - to C_6 -alkyl acrylates, C_1 - to C_6 -alkyl metacrylates, acrylic acids, metacrylic acids and vinyl acetate. The copolymer may also contain ionomeric structures (like in e.g. DuPont's Surlyn types).

[0042] Particularly preferred, the polar polymer comprises a copolymer of ethylene with C_1 - C_4 -alkyl acrylates or vinylacetate.

[0043] In addition to ethylene and the defined comonomers, the copolymers can also contain additional monomers.

[0044] It is further preferred that the polar polymer makes up an amount of 30 parts by weight (pbw) or more, more preferred of 50 pbw or more, and still more preferred of 70 pbw or more, per 100 pbw of component (A).

[0045] In a further preferred embodiment, the inventive composition further comprises a metal oxide (component (E)). Component (E) is of different chemical nature than component (C).

[0046] It has been found that by addition of such a metal oxide the flame retardant properties of the inventive composition as e.g. expressed by the LOI value can further be improved.

[0047] As component (E), also mixtures of metal oxides may be used.

[0048] Preferably, component (E) is selected from the oxides of the metals of group 2 to 15, more preferably of groups 2 to 13 of the periodic system of the elements.

[0049] It is further preferred that component (E) is selected from the group of Al_2O_3 , Fe_2O_3 and/or TiO_2 , and still more preferably is TiO_2 .

[0050] Preferably, component (E) is present in the inventive flame retardant polymer composition in an amount of 10 wt% or less, more preferred of 5 wt% or less, and still more preferred of 3 wt% or less with respect to the total weight of the polymer composition.

[0051] The inventive composition preferably may also comprise a metal stearate, preferably magnesium stearate. Further preferred, a stearate is added to the composition in a small amount, preferably of 5 wt. % or less, more preferably of 2 wt. % or less.

[0052] In addition to the above described components, the inventive compositions may also contain additional conventional polymer ingredients such as, for example, antioxidants or UV stabilizers in small amounts.

[0053] The flame retardant polymer composition according to the invention may be prepared by mixing together the components by using any suitable means such as conventional compounding or blending apparatus, e.g. a Bunbury Mixer, a 2-roll rubber mill or a twin screw extruder, Buss co-kneader, etc..

[0054] Generally, the composition will be prepared by blending the components together at a temperature which is sufficiently high to soften and plasticise the organic polymer, typically at a temperature in the range of 120 to 200 °C.

[0055] The flame retardant compositions according to the present invention can be used in many and diverse applications and products. The compositions can for example be moulded, extruded or otherwise formed into mouldings, sheets and fibers.

[0056] As already mentioned, a particularly preferred use of the flame retardant compositions is for the manufacture of wire and cables. The compositions can be extruded about a wire or a cable to form an insulating or jacketing layer or can be used as bedding compounds.

[0057] In the following the present invention is further illustrated by means of examples.

Examples

1. Compounding of compositions

[0058] Flame retardant polymer compositions according to the invention and for comparative purpose were produced by mixing together the components in a Brabender kneader (287 cm³) at a temperature of 140°C. The "Screw" speed was 60 rpm. When material was added the speed was lowered to 5 rpm to prevent material loss and dust. When mixed for approximately one minute the speed was increased up to 60 rpm again.

2. Produced compositions

[0059] The compositions according to the invention were produced by mixing an organic polymer, a carbonate, Mg-hydroxide, a stabilizer and optionally a silicone-group containing compound, and/or Mg-stearate and/or metal oxide (TiO₂), as indicated in Table 1.

[0060] The comparative compositions contained the components as indicated for the inventive compositions with the exception that either only a carbonate or only Mg-hydroxide was used as inorganic material (see also Table 1).

3. Determination of LOI (limited oxygen index)

[0061] LOI was determined using a Stanton Redcroft FTA Flammability Unit by the US standard ASTM D 2863-77 and the ISO 4589. The OI results are based on approximately 10 test specimens of dimension "150 x 6 mm". These are stamped out from a 3 mm thick plate pressed in a Collins press. (low pressure (20 bar) at 150°C during one minute followed by high pressure (200 bar) during five minutes at the same temperature). Cooling rate was 10°C/minute under high pressure. The compound was immediately taken from the Brabender kneader to the press.

[0062] LOI is a measure of the minimum oxygen concentration of an O₂/N₂ mixture required to sustain combustion for a minimum of 3 minutes or not propagate more than 5 cm from the top of the test specimen. LOI is a measure of ease of extinction.

4. Production of cables

[0063] 0.7 +/- 0.1 mm insulation of the different compounds outlined in table 1 was extruded onto 1.5 mm² copper conductor on a laboratory extrusion line (160-170-180°C, rpm, pressure die).

5. Single wire burning test

[0064] The test was done in full accordance with IEC 332-1. In order to fulfil the test the flame should extinguish after the flame from the 1 kW propane burner has been taken away and no charring should be visible within 50 mm from the upper support and below 540 mm. A wire fulfilling this criteria is marked "passed" in table 1.

6. Materials

[0065]

5 EVA 19 = Ethylenevinylacetate copolymer containing 19% vinylacetate and having a melt flow rate at 190°C, 2.16 kg (MFR₂) of 0.65 g/10min.

EVA 18 = Ethylenevinylacetate copolymer containing 18% vinylacetate and having a melt flow rate at 190°C, 2.16 kg (MFR₂) of 0.6 g/10 min.

10 EVA 20 = Ethylenevinylacetate copolymer containing 20% vinylacetate and having a melt flow rate at 190°C, 2.16 kg (MFR₂) of 20 g/10 min.

15 EBA 17 = Ethylenebutylacrylate copolymer containing 17% butylacrylate and having a melt flow rate at 190°C, 2.16 kg (MFR₂) of 1.2 g/10min.

HDPE/EVA18 = A polymer blend consisting of 20 % high-density polyethylene and 80 % EVA 18.

20 Silicone (pure) = Polydimethylsilicone elastomer having a plasticity 150 (1/10mm).

Silicone (m.b.) = Masterbatch consisting of 40% Silicone (pure) and 60% low-density polyethylene.

Ca-carbonate = Stearic acid (1%) coated calcium carbonate having an average particle size of 1.5 microns.

25 Mg-carbonate = Magnesium carbonate having an average particle size of 2.5 microns.

Mg-hydroxide (precipitated) = Surface coated (amount of the organic coating additive is 2%) magnesium hydroxide having an average particle size of 0.6-1 micron.

30 Mg-hydroxide (grained) = Stearic acid (1%) coated magnesium hydroxide having an average particle size of 2.5 microns.

Mg-stearate = Magnesium stearate.

35 Stabiliser = Combination of phenolic antioxidants.

TiO₂ = Titanium dioxide having an average particle size of 3 µm.

7. Results

40 [0066] The following conclusions can be made from table 1:

[0067] Comparative examples No. 1 and 9 show that it is not possible to pass single wire burning tests on the test object at a carbonate content below 58% and a magnesium hydroxide content below 48,5 % when combined with a silicone gum.

45 [0068] Combinations between carbonates and hydroxides show better flame retardant properties. Compound No. 8 shows for example that a total filler load of 48 % is enough to pass IEC 332-1 when a combination of carbonate/hydroxide and silicone gum is used. Compound No. 18 shows that a combination of hydroxide and carbonate not having any silicone gum pass IEC 332-1 at a filler load of 58. Keeping the filler load as low as possible is essential in order to achieve good processing and mechanical properties as well as low water absorption.

50 [0069] Component No. 19 shows that the properties of the inventive composition, e.g. LOI, can further be improved by addition of metal oxide.

Table 1:

	No. 1	No. 2	No. 3	No. 4	No. 5	No. 6	No. 7	No. 8	No. 9	No. 10
	comp.	inv.	inv.	inv.	inv.	inv.	inv.	inv.	comp.	inv.
organic polymer	EVA19/ 39.5%	EVA19/ 39.5%	EVA19/ 39.5%	EVA19/ 35.5%	EVA19/ 40.5%	EVA19/ 40.5%	EVA19/ 40.5%	EVA19/ 44.5%	EVA19/ 44.0%	EVA19/ 34.25%
silicone	2.5% pure	2.5% pure	2.5% pure	6.25% m.b.	6.25% m.b.	6.25% m.b.	6.25% m.b.	6.25% m.b.	6.25% m.b.	12.5% m.b.
carbonate	Mg, 58%	Mg, 29%	Ca, 29%	Ca, 29%	Mg, 26%	Mg, 26%	Ca, 26%	Ca, 24%	-	Mg, 26%
Mg-hydroxide	-	29% grained	29% precip.	29% precip.	26% precip.	26% grained	26% grained	24% grained	48.5% grained	26% precip.
Mg-stearate	1	-	-	-	1	1	1	1	1	1
stabilizer	0.25%	0.25%	0.25%	0.25%	0.25%	0.25%	0.25%	0.25%	0.25%	0.25%
IEC332-1 test	failed	passed	passed	passed	passed	passed	passed	passed	failed	passed
LOI	36.5				43.0	45.0		36.0	35.0	
Tensile strength at break on cable, 250 mm/min	7.4	8.3			10.0	10.6	11.6	13.6	15.6	8.9
Elongation at break on cable, 250 mm/min	243	99			456	499	521	583	557	432

Table 1 (continued):

	No. 11	No. 12	No. 13	No. 14	No. 15	No. 16	No. 17	No. 18	No. 19*	
	inv.	inv.	inv.	inv.	inv.	inv.	inv.	inv.	inv.	
organic polymer	EVA19/ 34.25%	EVA19/ 34.25%	EVA18/ 35%	EVA20/ 35.5%	EVA17/ 39.25%	EBA17/ 34.5%	EBA17/ 34.5%	HDPE/ EVA18/ 41.75%	EVA19/ 42.5%	
silicone	12.5% m.b.	12.5% m.b.	5% pure	6.25% m.b.	2.5% pure	6.25% m.b.	6.25% m.b.	-	6.25% m.b.	
carbonate	Mg, 26%	Ca, 26%	Ca, 30%	Ca, 29%	MG, 29%	Mg, 29%	Mg, 29%	Mg, 29%	Ca, 24%	
Mg-hydroxide	26% grained	26% grained	30% precip.	29% precip	29% grained	29% precip.	29% grained	29% precip.	24% grained	
Mg-stearate	1	1	-	-	-	1	1	-	1	
stabilizer	0.25%	0.25%	0.25%	0.25%	0.25%	0.25%	0.25%	0.25%	0.25%	
IEC332-1 test	passed	passed	passed	passed	passed	passed	passed	passed	passed	
LOI				40.8	40.5		35.5	33.0	37.0	
Tensile strength at break on cable, 250 mm/min	8.1	10.5			5.8	6.2	5.7	10.5		
Elongation at break on cable, 250 mm/min	416	513			211	351	299	61		

* This composition in addition to the components as indicated contained 2 wt% TiO₂.

Claims

1. A flame retardant polymer composition which is free of halogen compounds, comprising
 - (A) an organic polymer matrix,
 - (B) optionally a silicone-group containing compound,
 - (C) an inorganic filler material which is neither a hydroxide nor a hydrated compound, and
 - (D) an inorganic hydroxide or hydrated compound.
2. A flame retardant polymer composition according to claim 1, wherein component (B) mandatorily is present in the composition.
3. A flame retardant polymer composition according to claims 1 or 2, wherein components (C) and (D) together make up 30 wt% or more, further preferred 40 wt.% or more and still further preferred 45 wt.% or more of the total weight of the composition.
4. A flame retardant polymer composition according to any of the preceding claims, wherein components (C) and (D) together make up 85 wt% or less, further preferred 70 wt.% or less and still further preferred 65 wt.% or less of the total weight of the composition.
5. A flame retardant polymer composition according any of the preceding claims wherein the weight ratio between component (C) and component (D) is from 80:20 to 30:70, more preferred from 40:60 to 60:40 and still more preferred from 45:55 to 55:45.
6. A flame retardant polymer composition according to any of the preceding claims wherein component (D) is a metal hydroxide, more preferred is a hydroxide of a metal of group 2 of the periodic system of the elements and still more preferred is magnesium hydroxide.
7. A flame retardant polymer composition according to any of the preceding claims wherein component (C) is an inorganic carbonate, further preferred a carbonate of a metal of group 2 of the periodic system of the elements, aluminium and/or zinc, still further preferred is calcium carbonate and/or magnesium carbonate and most preferred is calcium carbonate.
8. A flame retardant polymer composition according to any of the preceding claims wherein component (B) is a silicone fluid or gum and/or a copolymer of ethylene and at least one other comonomer including a vinyl unsaturated polybis-hydrocarbyl-siloxane.
9. A flame retardant polymer composition according to claim 8 wherein wherein component (B) comprises polydimethylsiloxane and/or a copolymer of ethylene and vinyl-polymethylsiloxane.
10. A flame retardant polymer composition according to any of the preceding claims wherein component (B) is present in an amount of 0 to 70 wt.%, more preferred of 1 to 10 wt.% and still more preferred of 1 to 5 wt.% of the total weight of the composition.
11. A flame retardant polymer composition according to any of the preceding claims wherein the amount of component (B) is from 0.5 to 100 parts, more preferably 2 to 45 pbw, per 100 pbw of component (A).
12. A flame retardant polymer composition according to any of the preceding claims wherein component (A) is essentially formed by olefin homo- or copolymers.
13. A flame retardant polymer composition according to any of the preceding claims wherein component (A) comprises a polar polymer.
14. A flame retardant polymer composition according to claim 12 wherein the polar polymer comprises an olefin/acrylate and/or acetate copolymer.

EP 1 396 865 A1

15. A flame retardant polymer composition according to claim 13 wherein the polar polymer comprises a copolymer of ethylene with one or more comonomers selected from C₁- to C₆-alkylacrylates, C₁- to C₆-alkylmethacrylates, acrylic acid, methacrylic acid and vinylacetate including ionomers thereof.
- 5 16. A flame retardant polymer composition according to claim 14 wherein the polar polymer comprises a copolymer of ethylene with C₁- to C₄-acrylates.
- 10 17. A flame retardant polymer composition according to claims 12 to 15 wherein the polar polymer makes up an amount of 50 pbw or more, more preferred of 100 pbw or more and still more preferred of 200 pbw or more per 100 of the total weight of component (A).
18. A flame retardant polymer composition according to any of the preceding claims further comprising (E) a metal oxide.
- 15 19. A flame retardant polymer composition according to claim 16 wherein component (E) is selected from the oxides of the metals of groups 2 to 15, more preferably of groups 2 to 13 of the periodic system of the elements, still more preferably is selected from the group of Al₂O₃, Fe₂O₃ and/or TiO₂ and most preferably is TiO₂.
- 20 20. A flame retardant polymer composition according to any of the preceding claims wherein component (E) is present in an amount of 10 wt% or less, more preferably of 5 wt% or less and still more preferred of 3 wt% or less of the total weight of the composition.
- 25 21. A flame retardant polymer composition according to any of the preceding claims further comprising a metal stearate, preferably Mg-stearate.
- 30 22. An article, in particular a wire or a cable, comprising the flame retardant polymer composition according to any of the preceding claims.
- 35 23. Use of a flame retardant polymer composition according to any of claims 1 to 18 for the production of a flame retardant layer, in particular of a wire or a cable.
- 40
- 45
- 50
- 55



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 01 9663

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 1 000 981 A (SUMITOMO ELECTRIC INDUSTRIES) 17 May 2000 (2000-05-17) * examples 19,20,22,26-28,30,34-36,40-42,47-50 * * claims 1-5,7-9 *	1,3-7, 12,15, 22,23	H01B3/44 H01B3/46 C09K21/14 C08K3/22 C08K3/26
X	EP 0 390 647 A (OMYA SA ;TOTAL FRANCE (FR)) 3 October 1990 (1990-10-03) * the whole document *	1,3,4,6, 7,12-15, 22,23	
X	DATABASE WPI Section Ch, Week 198928 Derwent Publications Ltd., London, GB; Class A17, AN 1989-203132 XP002229678 & JP 01 141928 A (FUJIKURA CABLE WORKS LTD), 2 June 1989 (1989-06-02) * abstract *	1-4,6,8, 10, 12-16, 22,23	
D,A	WO 98 12253 A (BOREALIS AS ;LAURELL JUSSI (FI); HIRVENSALO MATTI (FI); SULTAN BER) 26 March 1998 (1998-03-26) * the whole document *	1,2,7-9, 12-16, 22,23	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H01B C09K C08K
A	WO 98 02889 A (ELECTROLUX AB ;TORNMALM GUNNAR (SE)) 22 January 1998 (1998-01-22) * claims *	1,2,6-9, 12-16, 22,23	
D,A	EP 0 393 959 A (BP CHEM INT LTD) 24 October 1990 (1990-10-24) * the whole document *	1,2,7-9, 12-16, 22,23	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 3 February 2003	Examiner Puetz, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03/02) (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 01 9663

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-02-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1000981 A	17-05-2000	AU 3954099 A	20-12-1999
		BR 9906472 A	02-01-2002
		EP 1000981 A1	17-05-2000
		US 6436557 B1	20-08-2002
		WO 9963004 A1	09-12-1999
		JP 2000219814 A	08-08-2000
EP 0390647 A	03-10-1990	FR 2644791 A1	28-09-1990
		EP 0390647 A1	03-10-1990
JP 1141928 A	02-06-1989	NONE	
WO 9812253 A	26-03-1998	SE 507330 C2	11-05-1998
		AT 227755 T	15-11-2002
		AU 715219 B2	20-01-2000
		AU 4406797 A	11-05-1998
		BR 9712049 A	24-08-1999
		CN 1176989 A	25-03-1998
		DE 69717130 D1	19-12-2002
		EP 0927224 A1	07-07-1999
		JP 2001500559 T	16-01-2001
		SE 9603371 A	18-03-1998
		WO 9812253 A1	26-03-1998
		US 6166120 A	26-12-2000
WO 9802889 A	22-01-1998	SE 506975 C2	09-03-1998
		AT 201113 T	15-05-2001
		AU 3712597 A	09-02-1998
		DE 69704770 D1	13-06-2001
		DE 69704770 T2	23-08-2001
		EP 0910855 A1	28-04-1999
		SE 9602763 A	13-01-1998
		WO 9802889 A1	22-01-1998
EP 0393959 A	24-10-1990	AT 129272 T	15-11-1995
		AU 627296 B2	20-08-1992
		AU 5372090 A	25-10-1990
		CA 2014357 A1	21-10-1990
		DE 69023039 D1	23-11-1995
		DE 69023039 T2	21-03-1996
		DK 393959 T3	05-02-1996
		EP 0393959 A2	24-10-1990
		ES 2077644 T3	01-12-1995
		JP 2300249 A	12-12-1990
		JP 3037713 B2	08-05-2000
		NO 901755 A	22-10-1990

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

EP 1 396 865 A1

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 02 01 9663

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-02-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0393959	A	NZ 233370 A	25-06-1991
		US 5091453 A	25-02-1992

EPO FORM P059

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82